



NP314T Series

Wall/Desktop Mounting

4 RS-232/485/422 to 2 100M Ethernet Ports Serial Device Server

- Support 4 RS-485/422, 3IN1 serial port or RS232 to 2 10/100Base-T(X) self-adaptive Ethernet interface
- Support RealCom, TCP Server, TCP Client, UDP Server, UDP Client, Pair Master, Pair Slave, UDP Rang, UDP Multicast and other operating modes
- Support 12~48VDC wide voltage input range
- Support -40~75°C wide temperature operation



Introduction

NP314T series are the serial device server that can make serial device be equipped with networking capability instantly and centrally manage the scattered serial devices and hosts via network. This series include 3 types of products and provide 4 RS-485/422, 3IN1 serial port or RS-232 to 2 100M Ethernet copper port. Thereinto, RS-485/422 supports electromagnetic isolation of serial port. It adopts wall/desktop mounting to meet the requirements of different application scenes.

Serial device server supports multiple network protocols, such as TCP, UDP, TELNET, ARP, ICMP, HTTP, DNS and DHCP protocol. It also possesses complete management functions, including Access Control, Rapid Configuration, Online Upgrading and so on. Each serial port supports 4 TCP or UDP session connections, and it also supports RealCom, TCP Server, TCP Client, UDP Server, UDP Client, Pair Master, Pair Slave, UDP Rang, UDP Multicast operating modes and TELNET, WEB access modes. Furthermore, supplied management configuration tool based on Windows platform can guide the user to manage and configure the device, achieving immediate networking of serial device via simple settings. It can provide users with good experience with friendly design of network management system interface, simple and convenient operation.

DIP switch can achieve restore factory defaults of the device. Hardware adopts fanless, low power consumption, wide temperature and voltage design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in PLC control and management, Building Automation System, Health Care Automation System, measuring instrument and environmental forces monitoring system.

Features and Benefits


- ⦿ Support 2 10/100Base-T(X) self-adaptive Ethernet interfaces, which provide double IP and MAC addresses to meet the requirements of network management or backup
- ⦿ Support 300bps-115200bps line speed and non-blocking communication
- ⦿ Support RealCom, TCP Server, TCP Client, UDP Server, UDP Client, Pair Master, Pair Slave, UDP Rang, UDP Multicast and other operating modes
- ⦿ Support across gateway and routing communication
- ⦿ Support multiple hosts polling mode, which allows multiple hosts to access the same serial port
- ⦿ Support delimiter matching communication, achieving various demands for serial port packaging
- ⦿ Support FIFO, compatible with various old type terminal devices
- ⦿ Support IP address and MAC address filtering, which can easily achieve accurate access control
- ⦿ Support classification of user management to realize humanized permission

management

- Support serial port status and parameters monitoring, ensuring the communication status be clear at a glance
- Support RTS/CTS, DTR/DSR and XON/XOFF flow control
- Compatible with various virtual serial port management software
- Support virtual serial port drive access mode and automatic connection recovery after network interruption
- Flexible serial port data framing setting, which can satisfy user's various demands for data packets segmentation
- Support standard TCP/IP SOCKET application access
- TCP supports multi-connection, which allows maximum 4 users to monitor or manage the serial device simultaneously
- UDP supports single machine or multi-machine communication, which allows multiple users to monitor or manage the serial device simultaneously
- Support Windows configuration tool, TELNET, WEB and other configuration forms

Dimension

Unit:mm

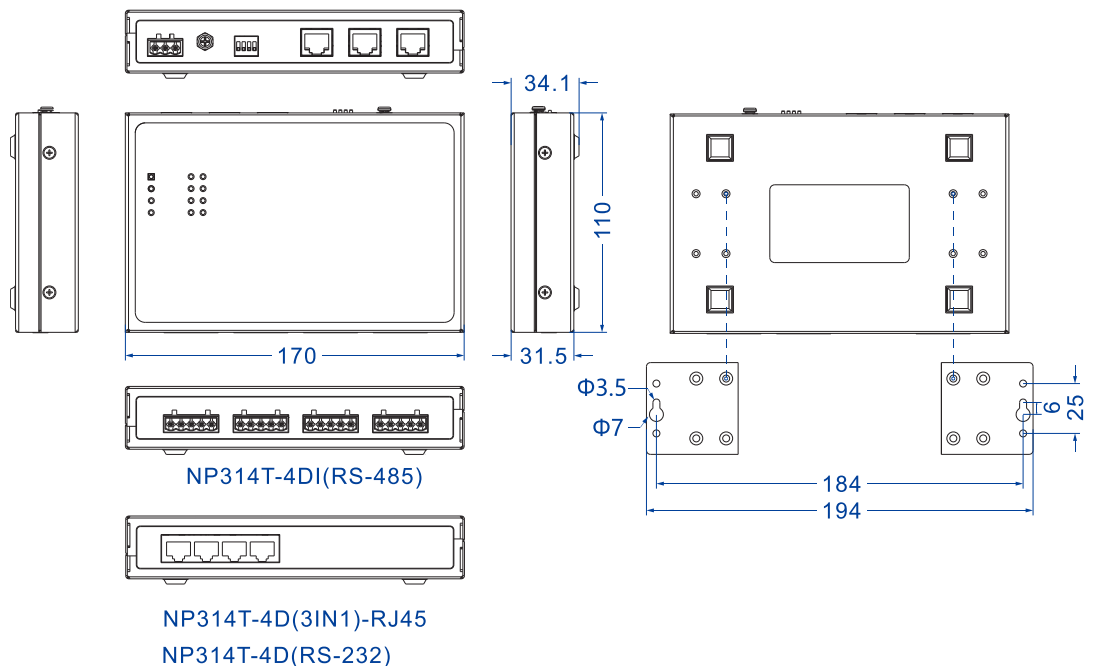

Specification

Ethernet

Standard: 10Base-T, 100Base-TX

Protocol: TCP, UDP, ARP, HTTP, TELNET, ICMP, DHCP, DNS

	<p>Rate: 10/100M automatic flow control, MDI/MDI-X autotuning</p> <p>Interface quantity: 2</p> <p>Interface form: RJ45</p> <p>Duplex mode: full/half duplex mode self-adaption</p> <p>Operating mode: 4 sessions, support RealCom, TCP Server, TCP Client, UDP Server, UDP Client, Pair Master, Pair Slave, UDP Rang and UDP Multicast operating modes</p>
--	--

Serial Port	<p>Standard: EIA RS-232C, RS-485, RS-422</p> <p>Quantity of serial port: 4 RS-485/422, 3IN1 serial port or RS-232</p> <p>RS-232 signal: DSR, RTS, GND, TXD, RXD, DCD, CTS, DTR</p> <p>RS-485 signal: D+, D-, GND</p> <p>RS-422 signal: T+, T-, GND, R+, R-</p> <p>Baud rate: 300-115200bps</p> <p>Data bit: 5bit, 6bit, 7bit, 8bit</p> <p>Parity bit: None, Even, Odd, Space, Mark</p> <p>Stop bit: 1bit, 2bit</p> <p>Interface form: RS-485/422 serial port with isolation, adopt 5 pins 5.08mm pitch terminal blocks</p> <p>3IN1 serial port, adopt RJ45</p> <p>RS-232, adopt RJ45</p> <p>Flow control: RTS/CTS, DTR/DSR, XON/XOFF</p> <p>Direction control: RS-485 direction adopts data flow automatic control technology</p> <p>Load capacity: RS-485/422 end supports 32 points polling (customizable 128 points)</p> <p>Pull high/low resistor for RS-485: 4.7kΩ</p> <p>Electromagnetic isolation strength: RS-485/422 serial port (terminal block), 3KVDC/2KVrms</p>
-------------	--

Configuration	WEB configuration management, TELNET configuration, Windows configuration tool
---------------	--

Security	Classification of User Permissions, IP address filtering, MAC address filtering, WEB console, TELNET console
----------	--

Indicator	Power supply indicator, running indicator, Ethernet port indicator, serial port indicator
-----------	---

Power Requirement	12~48VDC, 3-pin 5.08mm pitch terminal blocks Power supply nonpolarity
-------------------	--

Power Consumption	Model	No-load (@12VDC)	Full-load (@12VDC)
	NP314T-4DI(RS-485)	2.94W	2.94W
	NP314T-4D(3IN1)-RJ45	2.16W	3.00W
	NP314T-4D(RS-232)	2.16W	3.00W

Environmental Limit	Operating temperature range: -40~75°C Storage temperature range: -40~85°C Relative humidity: 5% ~ 95% (no condensation)
Physical Characteristic	Housing: IP30 protection, metal Installation: wall/desktop mounting Dimension (W x H x D): 170mm×31.5mm×110mm Weight: ≤590g
Industrial Standard	IEC 61000-4-2 (ESD, Electro-static Discharge) , Level 4 <ul style="list-style-type: none">● Air discharge: ±15kV● Contact discharge: ±8kV IEC 61000-4-4 (EFT/B, Electrical Fast Transient/Burst), Level 3 <ul style="list-style-type: none">● Power supply: ±2kV● Signal: ±1kV IEC 61000-4-5 (Surge), Level 3 <ul style="list-style-type: none">● Power supply: common mode ±2kV, differential mode ±1kV● Signal: common mode ±2kV, differential mode ±1kV Shock: IEC 60068-2-27 Free fall: IEC 60068-2-32 Vibration: IEC 60068-2-6
Certification	CE, FCC, RoHS
Warranty	3 years



Ordering Information

Available Models	100M Copper Port	RS-232	RS-485/422 (with isolation)	3IN1 (RS-232/485 /422)	Power Supply Range
NP314T-4DI(RS-485)	2	—	4	—	12~48VDC
NP314T-4D(3IN1)-RJ45	2	—	—	4	
NP314T-4D(RS-232)	2	4	—	—	



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

◀ Please scan our QR code for more details

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.