



## IMC100M Series

DIN-Rail Mounting

1/2 Copper Ports + 1 Fiber Port 100M/Gigabit Industrial Media Converter

- Support up to 2 100M copper ports, 1 100M fiber port, 2 Gigabit copper ports or 1 Gigabit fiber port
- Input voltage: 12~48VDC or 220VAC
- Support -40~75°C wide operating temperature range



Industrial Grade

## Introduction


IMC100M Series are 2/3-port 100M/Gigabit industrial media converter. This series provide 6 products and support a variety of interfaces including 100M copper ports, Gigabit copper ports, 100M fiber ports, Gigabit fiber ports and Gigabit SFP slots. They adopt DIN-Rail mounting to meet the requirements of different application scenes.

The DIP switch could implement functions like local and remote control, and flow control. The 1 copper port + 1 fiber port products support LFP. When the port of the device has link failures, the LFP indicator would be on to send alert, offering quick troubleshooting on the scene. The hardware adopts fanless, low power consumption and wide temperature and voltage design, which has passed rigorous industrial standard tests, and suits for the industrial scene environment with harsh requirements for EMC. It can be widely used in smart grid, railway transportation, smart city, safe city, new energy, intelligent manufacturing and other industrial fields.



## Dimension

Unit:mm

- 100M Media Converter

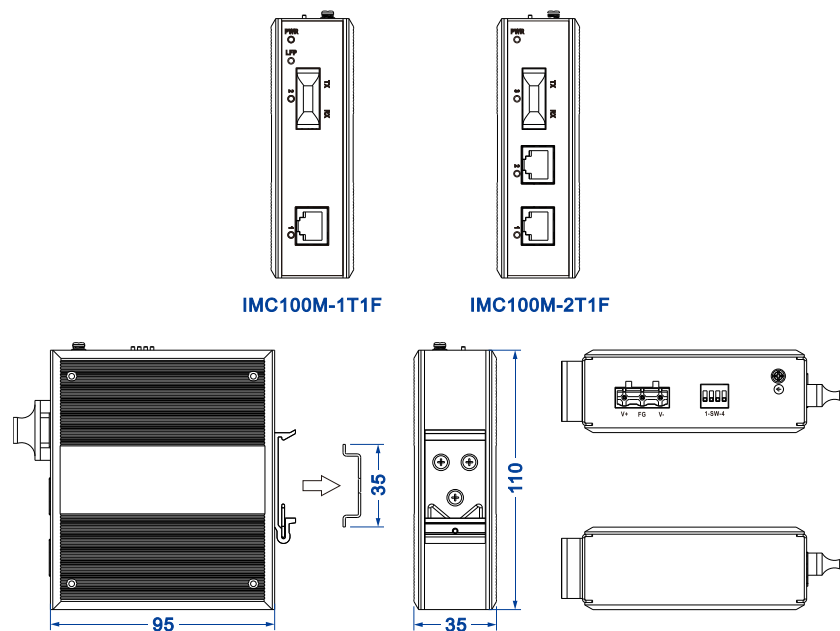

- Gigabit Media Converter

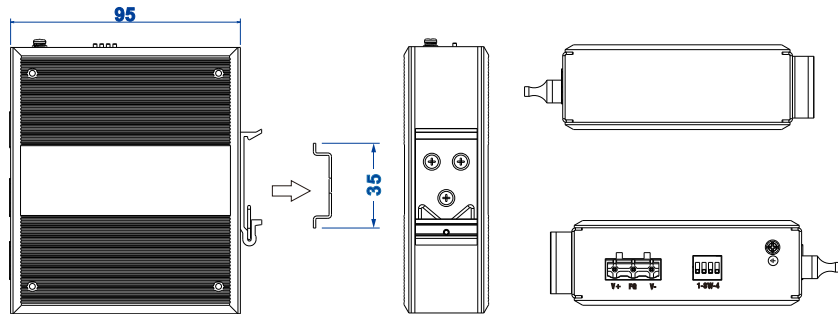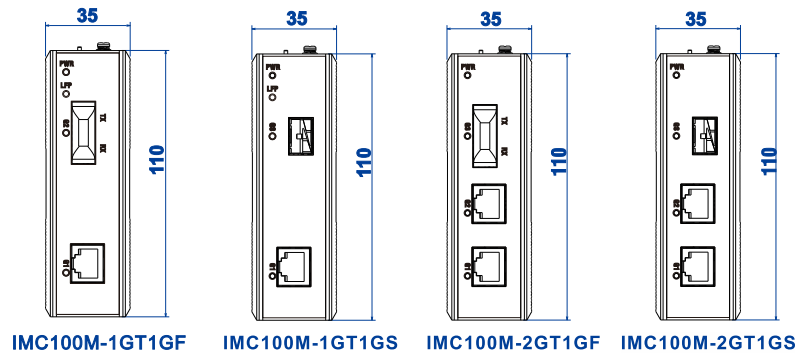

## Specification

Standard & Protocol	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX and 100Base-FX IEEE 802.3ab for 1000Base-T IEEE 802.3z for 1000Base-X
Interface	Copper port: 10/100Base-T(X) or 10/100/1000Base-T(X), RJ45, Automatic Flow Control, Full/half Duplex Mode, MDI/MDI-X Autotuning Fiber port: 100Base-FX, 1000Base-X, SFP slot or 1×9 optical module
Indicator	Interface Indicator, Power Supply Indicator, LFP Indicator (1 copper port and 1 fiber port product only)
Switch Property	Transmission mode: store and forward Switch time delay: <math><10\mu\text{s}</math> 100M Products: <ul style="list-style-type: none"> <li>● MAC address: 2K</li> <li>● Packet buffer size: 0.75M</li> <li>● Backplane bandwidth: 0.8G</li> </ul> Gigabit Products:

- MAC address: 8K
- Packet buffer size: 1M
- Backplane bandwidth: 14G

<b>Power Supply</b>	Input voltage: 12~48VDC or 220VAC, DC power nonpolarity
<b>Power Consumption</b>	No-load: ≤1.47W@24VDC Full-load: ≤1.95W@24VDC
<b>Working environment</b>	Operating temperature: -40~75°C Storage temperature: -40~85°C Relative humidity: 5%~95% (no condensation)
<b>Physical Characteristic</b>	Housing: IP40 protection, corrugated high-strength metal Installation: DIN-Rail mounting Weight: ≤355.6g Dimension (W x H x D): 35mm×110mm×95mm
<b>Industrial Standard</b>	IEC 61000-4-2 (ESD, electrostatic discharge), Level 3 <ul style="list-style-type: none"> <li>● Air discharge: ±8kV</li> <li>● Contact discharge: ±6kV</li> </ul> IEC 61000-4-4 (EFT, electrical fast transient pulses), Level 3 <ul style="list-style-type: none"> <li>● Power supply: ±2kV</li> <li>● Signal: ±1kV</li> </ul> IEC 61000-4-5 (Surge), Level 3 <ul style="list-style-type: none"> <li>● Power supply: common mode±2kV, differential mode±1kV</li> <li>● Signal: common mode ±1kV, differential mode ±1kV</li> </ul>
<b>Certification</b>	CE, FCC, RoHS certification
<b>Warranty</b>	5 years

## Ordering Information

Available Models	100M Copper Port	Gigabit Copper Port	100M Fiber Port	Gigabit Fiber Port	Gigabit SFP	Power Supply
IMC100M-1T1F	1	—	1	—	—	
IMC100M-2T1F	2	—	1	—	—	
IMC100M-1GT1GF	—	1	—	1	—	12~48VDC or 220VAC
IMC100M-1GT1GS	—	1	—	—	1	
IMC100M-2GT1GF	—	2	—	1	—	
IMC100M-2GT1GS	—	2	—	—	1	



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: [ics@3onedata.com](mailto:ics@3onedata.com)

Website: [www.3onedata.com](http://www.3onedata.com)

◀ [Please scan our QR code for more details](#)

\*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.